


Nýtovací matice

šestihranná, uzavřená s malou hlavou

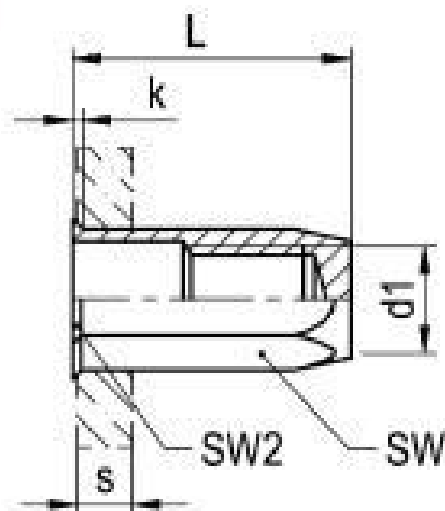

Materiál: ocel pozinkovaná

| d1 | Typ | SW 1 mm +0,1 | s mm | r (mm) min-max | SW mm | SW 2 mm | k mm | L mm | Pevnost v tahu N |
|------|--------------|--------------------|------------------------|----------------------------|--------------|--------------|------------|--------------|------------------------|
| M 4 | ERC | 6,0 | 0,5 – 2,0 | 11,3 - 12,1 | 5,9 | 6,6 | 0,4 | 16,0 | 6.750 |
| M 5 | ERC | 7,0 | 0,5 – 3,0 | 14,0 – 14,9 | 6,9 | 8,0 | 0,5 | 20,0 | 12.450 |
| M 6 | ERC SFHBL | 9,0 | 0,5 – 3,0 2,5 – 5,5 | 16,3 – 16,7 15,3 – 16,7 | 8,9 | 10,0 | 0,5 0,7 | 22,0 24,0 | 17.400 |
| M 8 | ERC SFHBL | 11,0 | 0,5 – 3,0 3,0 – 6,0 | 19,0 – 19,7 16,8 – 18,2 | 10,9 11,0 | 12,0 12,0 | 0,5 0,7 | 26,0 27,0 | 25.200 |
| M 10 | SFHBL | 13,0 | 3,0 – 6,0 | 20,8 – 22,7 | 13,0 | 14,5 | 0,85 | 32,5 | 35.500 |