


# Nýtovací matice

uzavřená, rýhovaná se zápusťnou hlavou 90°

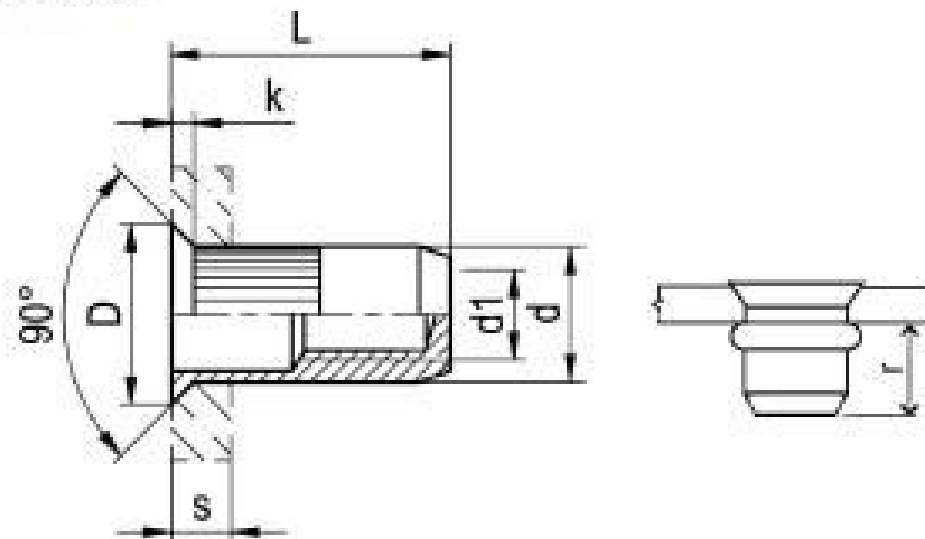

Materiál: ocel pozinkovaná

d1	Typ	Vrtání mm +0.1	s mm	r (mm) min-max	d mm	D mm	k mm	L mm	Pevnost v tahu N	Utahovací moment Nm
M 4	SFSC-Z	6,0	1,6 – 3,5	10,5	6,0	9,0	1,5	15,5	6.700	3
M 5	SFSC-Z	7,0	1,6 – 4,0 3,5 – 6,0	13,0	7,0	10,0	1,5	18,5 20,5	9.800	8
M 6	SFSC-Z	9,0	1,6 – 4,5 4,0 – 7,0	17,5	9,0	12,0	1,5	23,0 25,5	15.000	11
M 8	SFSC-Z	11,0	1,6 – 5,0 4,5 – 7,5	19,0	11,0	14,0	1,5	25,5 28,0	26.000	26
M 10	SFSC-Z	13,0	1,6 – 5,0	23,0	13,0	16,0	1,5	30,0	36.250	47