




NORMA: DIN 11023

ZÁVLAČKY SKLOPNÉ (zákolník)
LINCH PINS

Materiál: Ocel

Povrchová úprava: Bez povrchové úpravy




d1	d2 max	d3	a	h
4,5	34,5	2,9	37	42
6	38,5	3,5	48	42
8	38,5	3,5	48	42
10	38,5	3,5	48	42
11	38,5	3,5	48	42

NORMA: DIN 11024

ZÁVLAČKA pružinová jednoduchá,
SPRINGLOCK - single
SPRING LOCK COTTERS
OF A BOLT SINGLE

Materiál: Ocel, nerez - A2

Povrchová úprava: Zinek

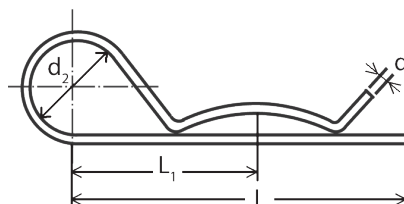

d1	pr. hřídel	vrták	d2	L	L1
2	9-14	2,5	10	50	25
3	10-16	3,5	18	60	28
4	16-20	4,5	20	60	30
5	20-28	6	24	85	40
6	28-40	7	30	105	50
7	28-45	8	30	105	50
8	30-45	9	28	110	55

NORMA: DIN 11024

ZÁVLAČKA pružinová,
SPRINGLOCK - double
SPRING LOCK COTTERS
OF A BOLT DOUBLE

Materiál: Ocel

Povrchová úprava: Zinek



d1	pr. hřídel	vrták	d2	L	L1
2	8-14	2,5	10	50	25
3	14-20	3,5	16	62	32
4	17-24	4,5	23	78	44
5	18-30	5,5	26	92	50
6	24-36	6,5	30	120	70
7	26-40	8	30	130	72
8	24-40	9	30	130	76

KÓD: 2560

KLÍNOVICE - TYČ TAŽENÁ
ROD

Materiál: Ocel, nerez - A2

Povrchová úprava: Zinek

d1	d2	l (m)
3	3	1
4	4	1
5	5	1
6	6	1
7	7	1
8	7	1
8	8	1
10	8	1
10	10	1
12	8	1
12	10	1
12	12	1
16	10	1